


Product description: VST4200C

Foamed Acrylic Tape
Colour: Transparent

Construction

Red PE Liner
Acrylic adhesive

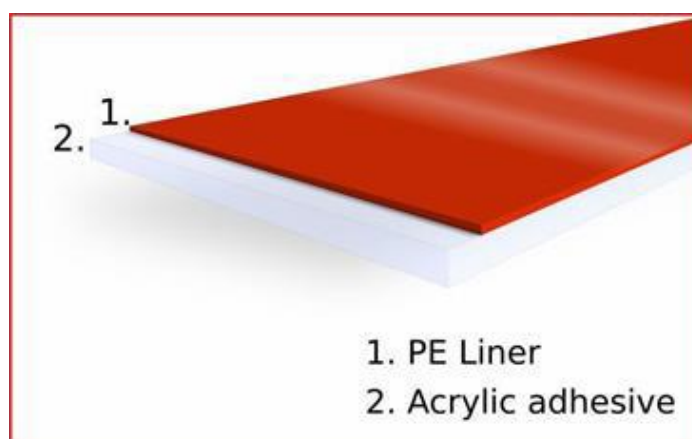

Technical data

Item	Unit		Spec.		Test method
Total thickness	mm	Inch	2.0(±0.1)	0.079(±0.004)	-
Density	kg/m ³	lb/ft ³	1000	62	-
180° Peel Strength	gf/25mm	lbf/in	3800	8.38	ASTM-D-3330
Tensile Strength (T-Block Test, Aluminium, Room temp.)	gf/cm ²	lbf/in ²	5000	71.11	ASTM-D-897
Dynamic Shear (after 20min, Stainless steel)	gf/cm ²	lbf/in ²	2500	35.56	ASTM D-1002
Dynamic Shear (after 24h, Stainless steel)	gf/cm ²	lbf/in ²	3500	49.78	ASTM D-1002
Temperature Resistance (Short Term)	°C	°F	160	320	-
Temperature Resistance (Long Term)	°C	°F	100	212	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Important Note:

Because of the variation in materials likely to be handled by prospective users of this product, together with differences in production techniques and ultimate performance required, it is important that this product is thoroughly evaluated under production and end use conditions before being commercially adopted. Such an evaluation should incorporate a reference to ageing and should be repeated if the substrates on which the adhesive is used are changed in any way or are purchased from a different source. It is the customer's responsibility to carry out the appropriate actions during the evaluation of the product for the protection of the environment and for the health and safety of its employees and purchasers of its products. No ECT Ltd employee has any authority to waive or change the forgoing provisions.

The above recommendations are made in good faith for the guidance of users and are without liability. All products are sold in accordance with the Company's terms and conditions which are shown on Company website www.ect.ie. Any queries should be referred to our Technical Services Department.

